

Motor data sheet


M2AA 80D 4

Definition	Data	Unit	Remarks
Product code	3GAA 082 214-**E		
Voltage code	P		
Type/Frame	M2AA 80D 4		
Design	CENELEC		
Efficiency class	IE2		
Rated output P_N	0.75	kW	
Rated voltage U_N	400	V D	± 5 % (IEC 60034-1)
Rated frequency f_N	50	Hz	± 2 % (IEC 60034-1)
Rated speed n_N	1415	r/min	
Rated current I_N	1.65	A	
Starting current I_S/I_N	5.9		
Nominal torque T_N	5	Nm	
Locked rotor torque T_l/T_N	2.6		
Maximum torque T_b/T_N	3.2		
Efficiency - full load 100%	79.8	%	Acc. to IEC 60034-2-1
Efficiency - 75%	81.3	%	
Efficiency - 50%	79.9	%	
Power factor - full load 100%	0.82		
Bearing DE/NDE	6204-2Z/C3 6203-2Z/C3		
Sound pressure level L_{pA} dB	50	dB(A)	+3dB(A)
Moment of inertia $J = \frac{1}{4} GD^2$ kgm ²	0	kg-m ²	
Weight	12	kg	

Motor data sheet

M2AA 80D 4

Running performance chart

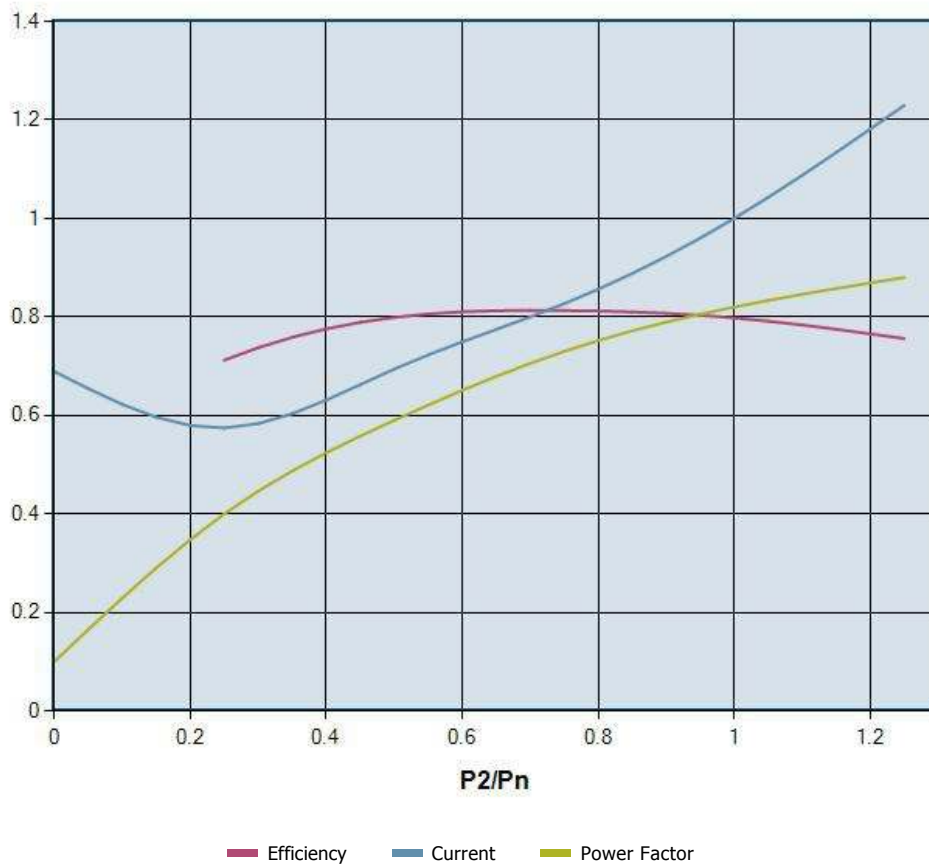

Motor data sheet

M2AA 80D 4

Starting performance chart information

