

Motor data sheet


M2AA 225SMA 6

Definition	Data	Unit	Remarks
Product code	3GAA 223 042-**G		
Voltage code	S		
Type/Frame	M2AA 225SMA 6		
Design	CENELEC		
Efficiency class	IE2		
Rated output P_N	30	kW	
Rated voltage U_N	380	V Y	± 5 % (IEC 60034-1)
Rated frequency f_N	50	Hz	± 2 % (IEC 60034-1)
Rated speed n_N	982	r/min	
Rated current I_N	58.4	A	
Starting current I_S/I_N	6.3		
Nominal torque T_N	290	Nm	
Locked rotor torque T_l/T_N	2.1		
Maximum torque T_b/T_N	2.5		
Efficiency - full load 100%	91.67	%	Acc. to IEC 60034-2-1
Efficiency - 75%	93.11	%	
Efficiency - 50%	93.4	%	
Power factor - full load 100%	0.85		
Bearing DE/NDE	6213-2Z/C3 6210-2Z/C3		
Sound pressure level L_{pA} dB	65	dB(A)	+3dB(A)
Moment of inertia $J = \frac{1}{4} GD^2$ kgm ²	0.53	kg-m ²	
Weight	265	kg	

Motor data sheet

M2AA 225SMA 6

Running performance chart

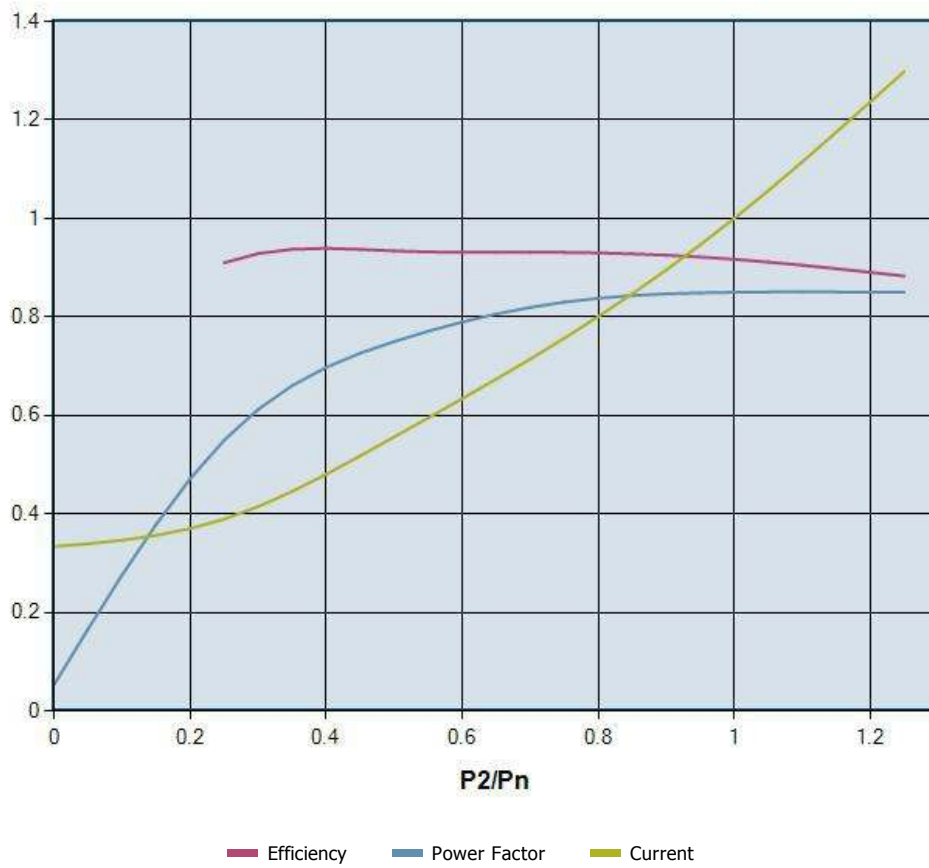

Motor data sheet

M2AA 225SMA 6

Starting performance chart information

