

Technical Data Sheet

CODE 61753

NORDIK EVOLUTION R 160/60" BIANCO

Reversible ceiling fans



Certifications


CE CE

EAC EAC

TECHNICAL AND PERFORMANCE DATA

Fan diameter	1590	Weight (Kg)	7,6
Frequency (Hz)	50/60*	Max airflow (m ³ /h)	17011
Insulation class	I°	Max airflow (m ³ /min)	283,52
Max absorbed current (A)	0,34	Max flow speed (m/s)	1,63
Max absorbed power (W)	70	RPM	193
Voltage (V)	220-240	Service value (m ³ /min)/W	4,050
		Sound power Lw [dB(A)]	55,6

DIMENSIONS

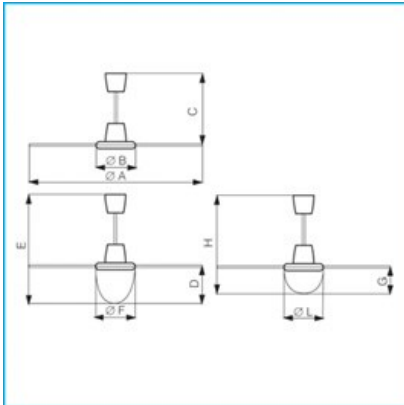

Size A (mm)	980
Size B (mm)	298
Size C (mm)	495
Size D (mm)	229
Size E (mm)	724
Size F (mm)	291
Size G (mm)	145
Size H (mm)	640
Size L (mm)	291

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND
Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com

Technical Data Sheet

CODE 61753

NORDIK EVOLUTION R 160/60" BIANCO



Reversible ceiling fans

DESCRIPTION

- Nominal diameter of blades 1600 mm
- Top and bottom motor covers moulded from heat-resistant and UV-resistant thermoplastic resin (ABS), colour white.
- Wiring connections at end of ceiling rod concealed by domes
- Moulded from impact- and UV-resistant thermoplastic resin (PP).
- Single phase start capacitor motor with external rotor, and shaft turning in ball bearings. Direction of rotation reversible.
- Maximum air flow 17011 m³/h
- 3 galvanized sheet steel blades powder coated with scratch-resistant polyester, colour white.
- Steel ceiling rod with scratch-resistant polyester powder coated finish, colour white, length 375 mm.
- Bag of accessories containing nuts and bolts required for assembly of blades, ceiling hook and rubber anti-vibration washer.
- Factory-prepared to accept a specific optional light kit with 2x15 W max energy saving lamp, E27 screw fitting.
- Speed selectable by way of control units or Telenordik 5TR remote control (optional)

ACCESSORIES



EVOLUTION LIGHT KIT

Code 22413



EVOLUTION LIGHT KIT ES

Code 22414



SCRR5

Code 12963



SCRR/M

Code 12965



KIT SCBRR5/5L/M

Code 22489



SC 503 B

Code 12801



SC 503 N

Code 12802



SC EXT B

Code 12803



SCI503

Code 22461



PSC-W

Code 22462



PSC-B

Code 22463



SCRR5L

Code 12964



ASTA NK I 200 BIANCA



ASTA NK I 250 BIANCA



ASTA NK I 350 BIANCA

Code 22032



**ASTA NK I 500
BIANCA**

Code 22051

Code 22033



**ASTA NK I 750
BIANCA**

Code 22074

Code 22042



**ASTA NK I 1000
BIANCA**

Code 22077



**TELENORDIK
5TR**

Code 22386



**SET PALE NK I
PLUS 160/60
BIANCO INT**

Code 22634



VORT DELTA T

Code 13039

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF
IRELAND

Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com