

# Motor data sheet

## M2AA 63B 2


For ordering purposes within selected meps, please add , Variant Code: 209 Special winding

Definition	Data	Unit	Remarks
Product code	3GAA 061 002-**C		
Voltage code	D		
Calculation_id	GEN_3GAA061002-C_D		
Type/Frame	M2AA 63B 2		
Design	CENELEC		
Efficiency class	IE4		
Rated output $P_N$	0.25	kW	
Rated voltage $U_N$	380	V X	± 5 % (IEC 60034-1)
Rated frequency $f_N$	50	Hz	± 2 % (IEC 60034-1)
Rated speed $n_N$	2800	r/min	
Rated current $I_N$	0.65	A	
Starting current $I_S/I_N$	4.4		
Nominal torque $T_N$	0.84	Nm	
Locked rotor torque $T_l/T_N$	3.3		
Maximum torque $T_b/T_N$	3		
Efficiency - full load 100%	79.5	%	Acc. to IEC 60034-2-1
Efficiency - 75%	77.9	%	
Efficiency - 50%	70.6	%	
Power factor - full load 100%	0.73		
Bearing DE/NDE	6202-2Z/C3 6201-2Z/C3		
Sound pressure level $L_{pA}$ dB	54	dB(A)	+3dB(A)
Moment of inertia $J = \frac{1}{4} GD^2$ kgm <sup>2</sup>	0	kg-m <sup>2</sup>	
Weight	4.4	kg	

# Motor data sheet

## M2AA 63B 2

### Running performance chart

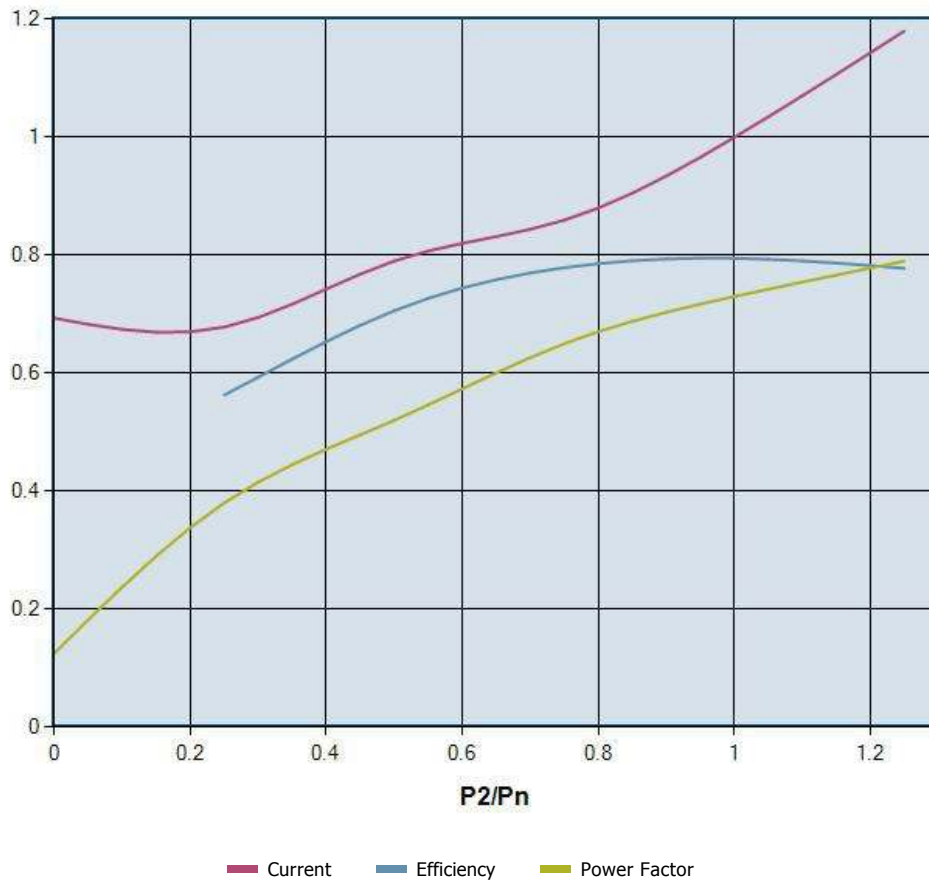

# Motor data sheet

## M2AA 63B 2

### Starting performance chart information

