

Technical Data Sheet

CODE 61756

NORDIK EVOLUTION R 120/48" NERO

Reversible ceiling fans



Certifications


CE CE

EAC EAC

TECHNICAL AND PERFORMANCE DATA

Fan diameter	1284	Weight (Kg)	6,8
Frequency (Hz)	50/60*	Max airflow (m ³ /h)	13810
Insulation class	I°	Max airflow (m ³ /min)	230,17
Max absorbed current (A)	0,34	Max flow speed (m/s)	2,36
Max absorbed power (W)	70	RPM	198
Voltage (V)	220-240	Service value (m ³ /min)/W	3,288
		Sound power Lw [dB(A)]	49,1

DIMENSIONS

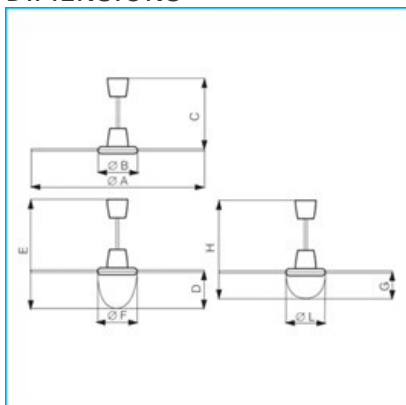

Size A (mm)	980
Size B (mm)	298
Size C (mm)	495
Size D (mm)	229
Size E (mm)	724
Size F (mm)	291
Size G (mm)	145
Size H (mm)	640
Size L (mm)	291

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND
Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com

Technical Data Sheet

CODE 61756

NORDIK EVOLUTION R 120/48" NERO



Reversible ceiling fans

DESCRIPTION

- Nominal diameter of blades 1200 mm
- Top and bottom motor covers moulded from heat-resistant and UV-resistant thermoplastic resin (ABS), colour black.
- Wiring connections at end of ceiling rod concealed by domes moulded from impact- and UV-resistant thermoplastic resin (PP).
- Single phase start capacitor motor with external rotor, and shaft turning in ball bearings. Direction of rotation reversible.
- Maximum air flow 13810 m³/h
- 3 galvanized sheet steel blades powder coated with scratch-resistant polyester, colour black.
- Steel ceiling rod with scratch-resistant polyester powder coated finish, colour black, length 375 mm.
- Bag of accessories containing nuts and bolts required for assembly of blades, ceiling hook and rubber anti-vibration washer.
- Factory-prepared to accept a specific optional light kit with 2x15 W max energy saving lamp, E27 screw fitting.
- Speed selectable by way of control units or Telenordik 5TR remote control (optional)

ACCESSORIES



EVOLUTION LIGHT KIT

Code 22413



EVOLUTION LIGHT KIT ES

Code 22414



SCRR5

Code 12963



SCRR5L

Code 12964



SCRR/M

Code 12965



KIT SCBRR5/5L/M

Code 22489



SC 503 B

Code 12801



SC 503 N

Code 12802



SC EXT B

Code 12803



SCI503

Code 22461



PSC-W

Code 22462



PSC-B

Code 22463



ASTA NK 275 NERA



ASTA NK 375 NERA



ASTA NK 520 NERA

Code 22036



**ASTA NK 775
NERA**

Code 22039

Code 22037



**ASTA NK 1025
NERA**

Code 22043



**TELENORDIK
5TR**

Code 22386

Code 22038



**SET PALE
120/48 NERO
PLUS-EVOL.
INT**

Code 22637



VORT DELTA T

Code 13039

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com