

Motor data sheet

M2AA 63B 6


For ordering purposes within selected meps, please add , Variant Code: 209 Special winding

Definition	Data	Unit	Remarks
Product code	3GAA 063 002-**C		
Voltage code	P		
Calculation_id	GEN_3GAA063002-C_D		
Type/Frame	M2AA 63B 6		
Design	CENELEC		
Efficiency class	IE2		
Rated output P_N	0.12	kW	
Rated voltage U_N	400	V D	± 5 % (IEC 60034-1)
Rated frequency f_N	50	Hz	± 2 % (IEC 60034-1)
Rated speed n_N	910	r/min	
Rated current I_N	0.51	A	
Starting current I_S/I_N	2.1		
Nominal torque T_N	1.25	Nm	
Locked rotor torque T_l/T_N	2.1		
Maximum torque T_b/T_N	2.1		
Efficiency - full load 100%	57.5	%	Acc. to IEC 60034-2-1
Efficiency - 75%	54	%	
Efficiency - 50%	46.2	%	
Power factor - full load 100%	0.58		
Bearing DE/NDE	6202 2Z C3 6201 2Z C3		
Sound pressure level L_{pA} dB	38	dB(A)	+3dB(A)
Moment of inertia $J = \frac{1}{4} GD^2$ kgm ²	0	kg-m ²	
Weight	4.5	kg	

Motor data sheet

M2AA 63B 6

Running performance chart

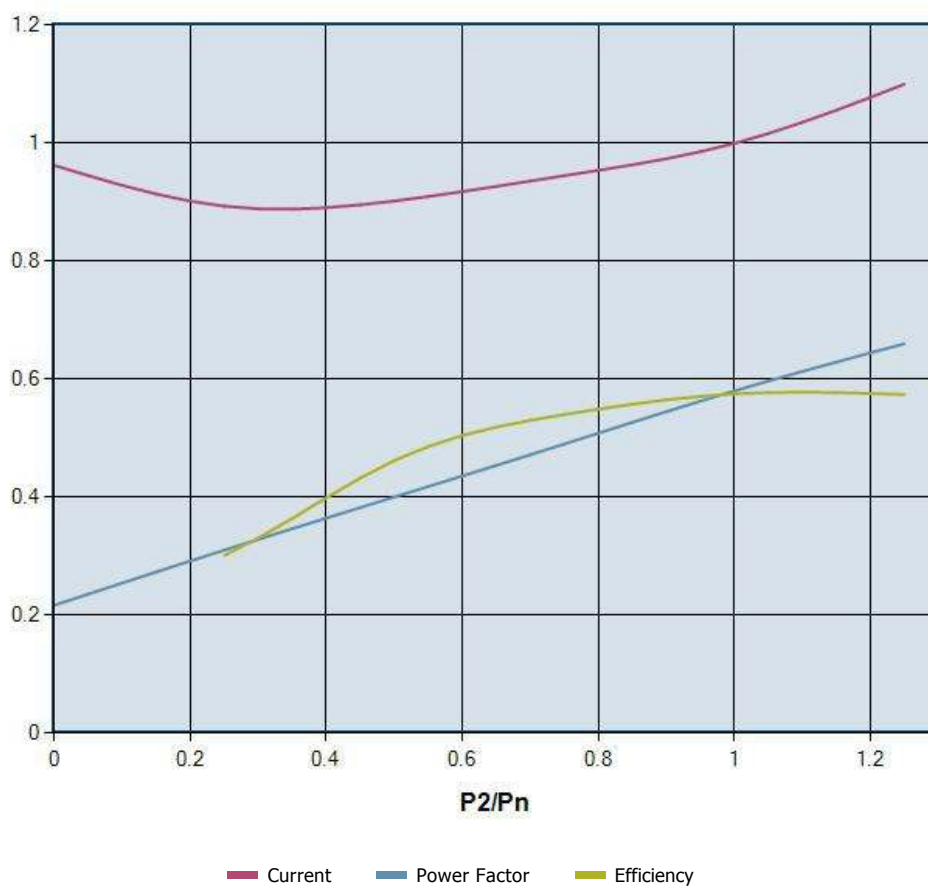

Motor data sheet

M2AA 63B 6

Starting performance chart information

